

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88303348.2

(51) Int. Cl.⁴: **H 01 S 3/133**

(22) Date of filing: 13.04.88

(30) Priority: 13.04.87 JP 90168/87
 13.04.87 JP 90169/87
 13.04.87 JP 90170/87
 13.04.87 JP 90171/87
 13.04.87 JP 90172/87
 05.02.88 JP 25886/88
 09.03.88 JP 55747/88

(43) Date of publication of application:
 19.10.88 Bulletin 88/42

(84) Designated Contracting States: DE FR GB IT NL

(71) Applicant: **SHARP KABUSHIKI KAISHA**
 22-22 Nagaike-cho Abeno-ku
 Osaka 545 (JP)

(72) Inventor: **Hatanaka, Kazuomi**
 846, Otoda-cho
 Ikoma-shi Nara-ken (JP)

Ohno, Takashi
 3-25-12, Temmadainishi Haibara-cho
 Uda-gun Nara-ken (JP)

Ogou, Kenji
 1-31-403, Higashikidera-cho
 Nara-shi Nara-ken (JP)

(74) Representative: **White, Martin David et al**
MARKS & CLERK 57/60 Lincoln's Inn Fields
 London WC2A 3LS (GB)

(54) An apparatus for driving a semiconductor laser device.

(57) An apparatus for driving a semiconductor laser device (1) wherein the optical output of the laser device is maintained at a predetermined level by means of two feedback control loops (A and B). The apparatus comprises at least two D/A converters (10, 15). One of said D/A converters (10) is used for conducting a coarse adjustment of the optical output level, and another of the D/A converters (15) is used for conducting a fine adjustment of the optical output level.

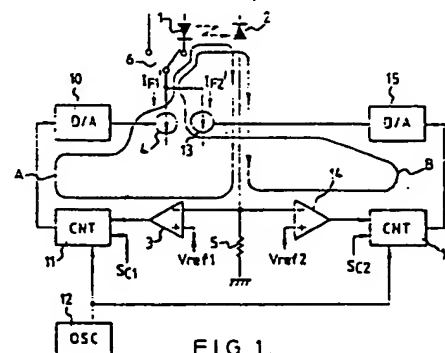


FIG. 1.

Description

AN APPARATUS FOR DRIVING A SEMICONDUCTOR LASER DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention:

This invention relates to a method of driving a semiconductor laser device and an apparatus for driving a semiconductor laser device.

2. Description of the prior art:

When driving a semiconductor device to obtain a laser beam, a forward current I_F is supplied to a pn junction in the laser device. The relationship between the forward current I_F and the optical output P_O of a semiconductor laser device is not linear. As the forward current I_F supplied to a semiconductor laser device increases, the laser device begins to oscillate a laser beam at a certain level of the current (a threshold current I_{th}). As the forward current I_F increases further, the laser output P_O also increases. Figure 2 shows an example of the relationship between the forward current I_F and the optical output P_O of a semiconductor laser device.

The level of a threshold current I_{th} and the rate of change in an optical P_O with respect to the change in a forward current I_F are not constant but vary according to an ambient temperature or to the individual semiconductor laser device. Such a rate of change in an optical output P_O is called a differential efficiency η .

When a semiconductor laser diode is driven at an optical output of a constant level, the system shown in Fig. 3 is generally used. In this system, a semiconductor laser diode 1 is driven by a current source 4 which is controlled by the output of an amplifier 3. The optical output of the laser diode 1 is monitored by a photodiode 2, and is converted into voltage by a resistor 5. The voltage is applied to one input terminal of the amplifier 3. The system shown in Fig. 3 constitutes a negative feedback loop. A reference voltage V_{ref} is applied to the other input terminal of the amplifier 3 so that the optical output of the laser diode 1 is controlled to have a predetermined level corresponding to the reference voltage V_{ref} .

The system shown in Fig. 3 is used for obtaining a constant optical output of a predetermined level. In certain kinds of application of a semiconductor laser diode, such as laser printers or optical communication, a semiconductor laser diode producing a constant optical output of a predetermined level is turned on and off at a high speed. Figure 4 shows an example of a system used for such an application.

The system of Fig. 4 comprises, in addition to the components in the system of Fig. 3, an analog switch 7 and a capacitor 8 which constitute a sample-and-hold circuit. The system of Fig. 4 further comprises a high-speed switch 6 and a buffer amplifier 9. The operation of the system of Fig. 4 will be described. First, the switch 6 is set to the right position, and the switch 7 is turned on to obtain an optical output of a predetermined level corresponding to the reference voltage V_{ref} . Thereafter, the switch 7 is turned off. At this stage, the voltage applied to the amplifier 9 is held at the voltage level of the capacitor 8 so that the driving current supplied to the laser diode 1 is maintained to be constant. Then, the switch 6 is turned off and on at a high speed, resulting in a high-speed switching of the optical output of a constant level.

With the system shown in Fig. 4, it is difficult to maintain the optical output at a constant level for a long period of time because the voltage of the capacitor 8 is an analog value. The system illustrated in Fig. 5 has been proposed to solve this problem, i.e., the system can maintain the optical output at a constant level for a long period of time.

The system of Fig. 5 is not provided with the sample-and-hold circuit (the analog switch 7 and capacitor 8) and the buffer amplifier 9 which are used in the system of Fig. 4, but comprises an up/down counter 11, a D/A converter 10, and an oscillator 12. In the system of Fig. 5, the amplifier 3 functions as a comparator. When the output of the comparator 3 is "HIGH", the up/down counter 11 counts up the output pulses of the oscillator 12. When the output of the comparator 3 is "LOW", in contrast, the counter 11 counts down the output pulses of the oscillator 12. The output of the counter 11 is converted into an analog value corresponding to the forward current I_F by the D/A converter 10. When the switch 6 is set to the right position, the forward current I_F from the current source 4 is supplied to the semiconductor laser diode 1 to drive the laser diode 1. The system of Fig. 5 constitutes a negative feedback loop so that the optical output of the laser diode 1 is regulated at a constant value corresponding to the reference voltage V_{ref} . An error which corresponds to one pulse of the output of the oscillator 12 may occur in the level of the optical output.

As digital codes are used in the feedback loop, the system of Fig. 5 can maintain the light output at a constant level for a long period of time. In the system of Fig. 5, however, the D/A converter 10 should have high resolution in order to maintain an optical output which is regulated to a constant level with high accuracy because the I_F - P_O characteristics of a semiconductor laser diode are not linear. This is referred to hereafter as a "first problem".

Referred to hereafter as a "second problem" is the fact that the I_F - P_O characteristics of a semiconductor laser diode are such that, if a forward current I_F is less than the threshold current I_{th} , laser oscillation does not occur. Accordingly, if the forward current I_F is less than the threshold current I_{th} , it cannot be used for control in driving the laser diode. For this reason, the quantization error of the forward current I_F is greater than the quantization error of the optical output P_O , resulting in less accuracy in controlling the optical output P_O .

The above-mentioned second problem will be discussed in more detail. Figure 12(a) shows a relation between an input (digital codes) and an output (forward current I_F) of D/A converter which are usually used in a conventional system such as shown in Fig. 5. Figure 12(b) shows a relation between optical outputs P_o of laser diode and digital codes in the conventional system of Fig. 5 which employs a D/A converter having the linear characteristics shown in Fig. 12(a). The digital codes corresponding to values lower than the threshold current I_{th} of a laser diode do not contribute to the optical output of the laser diode. As shown in Fig. 12(b), therefore, the range of the codes which are effective in practical use is restricted, resulting in a reduced effective resolution of the D/A converter. In Fig. 12(b), " W_q " indicates a quantization width of the optical output P_o .

A "third problem" referred to hereafter is as follows:- In the system of Fig. 5, an optical output of a desired level can be obtained by applying a reference voltage V_{ref} which corresponds to the desired optical output level and closing the negative feedback loop (hereinafter, this process is referred as "calibration"). As the calibration is not directly related to the driving operation of the laser diode 1, it is difficult to employ the system of Fig. 5 in an apparatus in which the optical output level should be changed very frequently. In an optical magnetic disk recording apparatus, for example, the optical output is changed into three levels (reading, erasing, and recording level).

SUMMARY OF THE INVENTION

The apparatus for driving a semiconductor laser device of this invention, which overcomes the above-discussed and numerous other disadvantages and deficiencies of the prior art, maintains the optical output of the laser device at a predetermined level by a feedback control, and comprises at least two D/A converters are provided, one of the D/A converters being used for conducting a coarse adjustment of the optical output level, and another of the D/A converters being used for conducting a fine adjustment of the optical output level.

In a preferred embodiment, at least two feedback loops are formed to conduct the feedback control, and the D/A converters are disposed in said feedback loops, respectively. Embodiments of this invention aim to overcome the first problem outlined above.

According to the present invention, there is further provided a D/A converter disposed in a feedback loop for controlling the optical output of said laser device, said D/A converter has a non-linear characteristic. Embodiments of this invention aim to overcome the second problem outlined above.

According to the present invention, there is further provided a D/A converter disposed in a feedback loop for controlling the optical output of said laser device, said D/A converter provided an offset output. Embodiments of this invention also aim to overcome the second problem.

According to the present invention, there is further provided a D/A converter disposed in a feedback loop for controlling the optical output of said laser device, a current supplying means is provided separately from said feedback loop, said current supplying means supplying a current of a predetermined level to said laser device. Embodiments of this invention also aim to overcome the second problem.

According to the present invention, there is further provided a D/A converter in which, the input of said D/A converter is connected to a control means for controlling the optical output of said laser device, said control means comprising a memory means in which one of more relations between optical output levels of said laser device output levels of said control means are previously stored, said control means calculating from said stored relations a level of an output which corresponds to a predetermined optical output level and supplying an output of the calculated level to said D/A converter. Embodiments of this invention aim to overcome the third problem above.

Thus, the invention described herein makes possible the objectives of (1) providing an apparatus for driving a semiconductor laser device which can control an optical output level with high accuracy; and (2) providing an apparatus for driving a semiconductor laser diode which can change the optical output to desired levels at a very high frequency.

BRIEF DESCRIPTION OF THE DRAWINGS

This invention may be better understood and its numerous objects and advantages will become apparent to those skilled in the art by reference to the accompany drawings as follows:

Figure 1 is a diagram showing an embodiment of the invention in which two negative feedback loops are formed.

Figure 2 is a graph showing a relation between a forward current I_F and an optical output level of a laser diode.

Figure 3 is a diagram showing an example of a conventional apparatus.

Figure 4 is a diagram showing another example of a conventional apparatus in which a sample-hold circuit is used and the optical output of a laser diode is switched at a high frequency.

Figure 5 is a diagram showing a further example of a conventional apparatus in which a D/A converter is disposed in a feedback loop.

Figure 6 is a graph showing a I_F - P_o characteristic of a laser diode and also a manner of controlling the forward current according to the embodiment shown in Fig. 1.

Figure 7 is a diagram showing another embodiment of the invention.

Figure 8 is a diagram showing a further embodiment of the invention.

Figure 9 is a graph showing a I_F - P_o characteristic of a laser diode and also a manner of controlling the

forward current according to the embodiment shown in Fig. 8.

Figure 10 is a diagram showing a further embodiment of the invention.

Figure 11 is a graph showing a I_F - P_O characteristic of a laser diode and also a manner of controlling the forward current according to the embodiment shown in Fig. 10.

Figures 12(a) and 12(b) are respectively a graph showing a relation between digital codes and the forward current and a graph showing a relation between digital codes and the optical output of the laser diode, according to the conventional example shown in Fig. 5.

Figure 13 is a diagram showing a further embodiment of the invention.

Figures 14(a) and 14(b) are graphs similar to Figs. 12(a) and 12(b), according to the embodiment shown in Fig. 13.

Figure 15 is a diagram showing a further embodiment of the invention.

Figures 16(a) and 16(c) are respectively a graph showing an example of relation between digital codes and the forward current and a graph showing a relation between digital codes and the optical output of the laser diode, according to the embodiment shown in Fig. 15.

Figures 16(b) and 16(d) are respectively a graph showing another example of relation between digital codes and the forward current and a graph showing a relation between digital codes and the optical output of the laser diode, according to the embodiment shown in Fig. 15.

Figure 17 is a diagram showing a further embodiment of the invention.

Figures 18(a) and 18(b) are graphs showing relations between digital codes and the optical output of the laser diode, according to the embodiment shown in Fig. 17.

Figure 19 is a diagram of a further embodiment of the invention.

Figure 20 is a diagram of a further embodiment of the invention.

Figure 21 is a graph for illustrating the operation of the embodiments shown in Figs. 19 and 20.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a block diagram of an embodiment of the invention. The system of Fig. 1 which drives a semiconductor laser diode 1 comprises a photodiode 2 for monitoring the optical output of the laser diode 1, first and second comparators 3 and 14, first and second up/down counters 11 and 16, first and second D/A converters 10 and 15, first and second current sources 4 and 13 which are controlled respectively by the outputs of the D/A converters 10 and 15, a resistor 5, and a high-speed switch 6. A first reference voltage V_{ref1} is applied to one input terminal of the first comparator 3, and a second reference voltage V_{ref2} is applied to one input terminal of the second comparator 14. The first and second up/down counters 11 and 16 are controlled by the control signals SC_1 and SC_2 , respectively. The system has two negative feedback loops A and B.

The first feedback loop A consists of the laser diode 1, the photodiode 2, the first comparator 3, the first counter 11, the first D/A converter 10, the first current source 4, and the switch 6. The first feedback loop A conducts a coarse adjustment of the optical output P_O .

The second feedback loop B consists of the laser diode 1, the photodiode 2, the second comparator 14, the second counter 16, the second D/A converter 15, the second current source 13, and the switch 6. The second feedback loop B conducts a fine adjustment of the optical output P_O .

In the system of Fig. 1, each of the two feedback loops A and B operates in approximately the same manner as the feedback loop used in the system of Fig. 5. But, the first reference voltage V_{ref1} is set to a level corresponding to an optical output P_{O1} which is slightly lower than a desired optical output P_{O2} , and the second reference voltage V_{ref2} is set to a level corresponding to the desired optical output P_{O2} .

The operation of the system of Fig. 1 will be described with reference to Fig. 6. The counter 11 and 16 are reset by the control signals SC_1 and SC_2 so that the current sources 4 and 13 do not supply a forward current to the laser diode 1. Then, the switch 6 is set to the right position. The first counter 11 is controlled to begin the count-up operation by the control signals SC_1 to actuate the first feedback loop A. The output current I_{F1}' of the first current source 4 increases toward the level of the driving current I_{F1} which can produce the optical output P_{O1} . After reaching the current level I_{F1} , the forward current I_{F1}' comes to oscillate within the range of $\pm \Delta I_{F1}$ (i.e., $I_{F1}' = I_{F1} \pm \Delta I_{F1}$). The value ΔI_{F1} is obtained by a multiplication of the output current of the first current source 4 when the first D/A converter 10 is at full scale and the resolution of the first D/A converter 10. Namely, ΔI_{F1} is the current of the first current source 4 which corresponds to 1 LSB of the first D/A converter 10. Then, the first counter 11 halts the operation of counting the pulses of the oscillator 12, and maintains the output level of the value obtained at that time. The output current I_{F1}' of the first current source 4 is kept at a constant value within the range of $I_{F1} \pm \Delta I_{F1}$.

Thereafter, the second counter 16 is put into operation of counting up the pulses of the oscillator 12 to actuate the second feedback loop B. The driving current supplied to the laser diode 1 becomes a sum of the output current I_{F1}' of the first current source 4 and the output current I_{F2}' of the second current source 13. The output current I_{F2}' increases toward the level of an output current I_{F2} so that the optical output of the laser diode 1 reaches the desired output level P_{O2} which can be obtained by supplying a sum of the currents I_{F1}' and I_{F2} to the laser diode 1. As the current I_{F1}' flowing in the feedback loop A is kept at a constant level (the final value of I_{F1}'), the current I_{F2}' comes to oscillate within the range of $\pm \Delta I_{F2}$ (i.e., $I_{F2}' = I_{F2} \pm \Delta I_{F2}$). The value ΔI_{F2} is obtained by a multiplication of the output current of the second current source 13 when the second D/A converter 15 is at full scale and the resolution of the second D/A converter 15. Namely, ΔI_{F2} is the current of the second current source 13 which corresponds to 1 LSB of the second D/A converter 15. Then, the second

counter 16 halts the operation of counting the pulses of the oscillator 12, and holds the value obtained at that time. The output current I_{F2}' of the second current source 13 is kept at a constant value within the range of $I_{F2} \pm \Delta I_{F2}$.

The degree of the deviation of the final driving current supplied to the laser diode 1 which is a sum of the output currents I_{F1}' and I_{F2}' from the objective value which is a sum of the currents I_{F1} and I_{F2} does not depend on the error of the first feedback loop A (i.e. $\pm \Delta I_{F1}$), but depends only on the error of the second feedback loop B (i.e. $\pm \Delta I_{F2}$). As mentioned above, the degree of the error $\pm \Delta I_{F2}$ is proportional to the output current of the second current source 13 when the second D/A converter 15 is at full scale, and also to the resolution of the second D/A converter 15. The output current I_{F2}' of the second current source 13 when the second D/A converter 15 is at full scale can be selected to be sufficiently smaller than the current I_{F1} . Consequently, compared to a system having one feedback loop in which a D/A converter having the same resolution is used, the error of the system of Fig. 1 which corresponds to ΔI_{F2} is very small, resulting in that the optical output P_0 can be controlled with high accuracy.

The first reference voltage V_{ref1} may be set to be slightly higher than the voltage corresponding to the desired optical output P_{02} so that the optical output of the laser diode 1 approaches the desired value from the side of higher values. In this case, the result is the same as that obtained in the system described above.

Figure 7 shows a more specific embodiment of the invention. The system of Fig. 7 comprises a semiconductor laser diode 101, a photodiode 102, a resistor 105, a high speed switch 106, first and second current sources 104 and 113, first and second D/A converters 110 and 115, first and second up/down counters 111 and 116, and an oscillator 112. In the system of Fig. 7, the first and second reference voltages V_{ref1} and V_{ref2} are supplied by the circuit which consists of a comparator 103, a voltage source V_s , resistors R_1 , R_2 and R_3 , and a transistor Q_1 . The system of Fig. 7 further comprises AND gates 117 to 120, NOT gates 121 and 122, and an OR gate 123.

The output of the comparator 103 is connected to the up/down terminal of each of the counters 111 and 116. The output pulses of the oscillator 112 are supplied to the first and second counters 111 and 116 through the AND gates 119 and 120, respectively. As shown in Fig. 7, control signals R and C which are sent from a control means (not shown) are supplied to the reset terminals of the first and second counters 111 and 116, and the base of the transistor Q_1 through the gates 117 to 122. Switching pulses SW and the control signal C are supplied to input terminals of the OR gate 123. The output of the OR gate 123 is supplied to the switch 106. When the transistor Q_1 is on, the first reference voltage V_{ref1} is applied to one input terminal of the comparator 103. When the transistor Q_1 is off, the second reference voltage V_{ref2} which is higher than the first reference voltage V_{ref1} is applied to one input terminal of the comparator 103.

The process of setting the optical output of the laser diode to a constant value comprises stages a to d. In the stages a to d, the control signal R is changes in the sequence of "1, 1, 0, and 0", and the control signal C is changed in the sequence of "0, 1, 1, and 0".

In stage a, the control signal R is "1", and the control signal C is "0", whereby resetting both the first and second counters 111 and 116 and inhibiting the output pulses of the oscillator 112 from entering into the counters 111 and 116. Hence, the laser diode 101 is not driven in stage a.

In stage b, both the control signals R and C are "1". The transistor Q_1 is turned on to apply the first reference voltage V_{ref1} to one input terminal of the comparator 103. The output of the comparator 103 becomes high so that the first counter 111 starts the operation of counting up the pulses of the oscillator 112. During stage b, the switch 106 is on. A first feedback loop consisting of the laser diode 101, the comparator 103, the first counter 111, the first converter 110, the first current source 104, and the switch 106 begins to supply the forward current I_{F1}' to the laser diode 101, while increasing the forward current I_{F1}' to the vicinity of the current I_{F1} which corresponds to the initial target value P_{01} of the optical output.

Then, the control signal R is changed to be "0" (stage c). In stage c, the pulses of the oscillator 112 are not supplied to the first counter 111, and the first counter 111 halts the counting operation so that the first feedback loop maintains the supply of the forward current I_{F1}' corresponding to the value of the first counter 111 which value has been obtained at the end of the stage b. The transistor Q_1 is turned off to apply the second reference voltage V_{ref2} to one input terminal of the comparator 103. The second counter 116 starts the operation of counting up the pulses of the oscillator 112. A second feedback loop consisting of the laser diode 101, the comparator 103, the second counter 116, the second converter 115, the second current source 113, and the switch 106 begins to supply the forward current I_{F2}' to the laser diode 101. In the same manner as the system of Fig. 1, the driving current of the laser diode 101 which is the sum of the currents I_{F1}' and I_{F2}' increases to the level at which the desired optical output P_{02} is obtained.

Thereafter, the control signal C is changed to be "0" (stage d). The second counter 116 halts the counting operation so that the second feedback loop maintains the supply of the forward current I_{F2}' corresponding to the value of the second counter 116 which value has been obtained at the end of the stage c. Therefore, the laser diode 101 is driven by the sum of the currents I_{F1}' and I_{F2}' which corresponds to the desired optical output P_{02} . The switch 106 is turned on and off in synchronization with the switching pulse SW so that the laser diode 101 which emits a laser beam of the desired level P_{02} is turned on and off at a high speed.

In this way, the system of Fig. 7 can control the optical output with high accuracy. The control logic and operation of the system of Fig. 7 are summarized in Table 1.

Table 1

5	<u>Stage</u>	<u>R</u>	<u>C</u>	<u>Counter 111</u>	<u>Counter 116</u>	<u>Q1</u>	<u>Switch 106</u>
	a	1	0	Reset	Reset	Off	On or off according to SW
10	b	1	1	Count	Reset	On	On
	c	0	1	Halt	Count	Off	On
15	d	0	0	Halt	Halt	Off	On or off according to SW

Another embodiment of the invention is shown in Fig. 8. The arrangement of the system of Fig. 8 is substantially the same as that of the system of Fig. 7 except that a NAND gate 124 is provided instead of the AND gate 117 and that the control signal R is supplied to the set terminal of the second counter 116. In the system of Fig. 8, the initial output level P_{01} which is obtained by the forward current I_{F1}' is set to be higher than the desired level P_{02} of the optical output. When the set terminal of the counter 116 is HIGH, the counter 116 is set to have a value of the full scale. As shown in Fig. 9, the optical output approaches the desired value P_{02} from the side of higher values. The operation of the system of Fig. 8 is summarized in Table 2.

Table 2

30	<u>Stage</u>	<u>R</u>	<u>C</u>	<u>Counter 111</u>	<u>Counter 116</u>	<u>Q1</u>	<u>Switch 106</u>
35	a	1	0	Reset	Set	On	On or off according to SW
	b	1	1	Count	Set	Off	On
40	c	0	1	Halt	Count	On	On
	d	0	0	Halt	Halt	On	On or off according to SW

Figure 10 illustrates a further embodiment of the invention. According to the system of Fig. 10, an initial output level which is obtained by the first feedback loop (coarse adjustment) is set to a value which is the same as the desired (final) output level P_0 . Hence, the system of Fig. 10 does not require the components for changing the level of the reference voltage (i.e., the resistors R1 to R3 and the transistor Q1) which are used in the systems of Figs. 7 and 8. When the set terminal is HIGH, the counter 116 disposed in the second feedback loop (fine adjustment) is set to have a value of half of the full scale. The operation of the system of Fig. 10 is illustrated in Fig. 11 and is summarized in Table 3.

Table 3

Stage	R	C	Counter 111	Counter 116	Switch 106
a	1	0	Reset	1/2 x full scale	On or off according to SW
b	1	1	Count	1/2 x full scale	On
c	0	1	Halt	Count	On
d	0	0	Halt	Halt	On or off according to SW

Figure 13 shows a further embodiment of the invention. The configuration of the system shown in Fig. 13 is similar to that of the system of Fig. 5, but employs a D/A converter 10a having non-linear characteristics instead of the converter 10 in the system of Fig. 5. The relation between an input (digital codes) and an output (forward current I_F) of the D/A converter 10a in this embodiment is shown in Fig. 14(a). In the range wherein the forward current I_F is smaller than the threshold current I_{th} , the quantization width W_1 is wide, and in the range wherein the forward current I_F is larger than the threshold current I_{th} , the quantization width W_2 is narrow.

Figure 14(b) shows a relation between optical output P_o and the digital codes of the D/A converter 10a in this embodiment. Because of the non-linear characteristics of the converter 10a, the number of the digital codes which correspond to the current levels lower than the threshold current I_{th} is small, compared to that of the conventional system which is shown in Fig. 12. In other words, the number of the codes which are effective in the control of the optical output of the laser diode is large even when the D/A converter 10a has the same number of digital codes as that of the D/A converter 10 of Fig. 5, resulting in an improved effective resolution of the D/A converter 10a and also in a very accurate control of the optical output.

Figure 15 shows a further embodiment of the invention. The configuration of the system shown in Fig. 15 is similar to that of the system of Fig. 13, but employs a D/A converter 10b having a characteristic that an offset current of a certain level flows when the digital code is zero. In an example of the characteristic shown in Fig. 16(a), the offset current I_{os} is greater than the threshold current I_{th} . In another example shown in Fig. 16(b), the offset current I_{os} is smaller than the threshold current I_{th} . The relation between an input (digital code) and an output (forward current I_F) of the D/A converter 10b having the characteristics of Fig. 16(a) is shown in Fig. 16(c), and that of the D/A converter 10b having the characteristics of Fig. 16(b) is shown in Fig. 16(d). There is no digital codes in the range lower than the threshold current I_{th} (Fig. 16(a)), or there is a small number of digital codes in the range lower than the threshold current I_{th} (Fig. 16(b)). Namely, the number of the codes which are effective in the control of the optical output of the laser diode is large even when the D/A converter 10b has the same number of digital codes as that of the D/A converter 10 of Fig. 5, resulting in an improved effective resolution of the D/A converter 10b and also in a very accurate control of the optical output.

Figure 17 shows a further embodiment of the invention. The configuration of the system shown in Fig. 17 is similar to that of the system of Fig. 15 except that a second current source 4a is provided. The current source 4a supplies an offset current I_{os} of a certain level to the laser diode 1, i.e., the laser diode 1 is driven by the sum of the forward current I_F and the offset current I_{os} . Figures 18(a) and 18(b) show the relations between digital codes of the D/A converter 10 and optical outputs P_o of the laser diode 1 when the offset current I_{os} is greater or smaller than the threshold current I_{th} , respectively. When the offset current I_{os} is smaller than the threshold current I_{th} , the number of the codes which are ineffective in the control of the optical output of the laser diode 1 is small (Fig. 18(b)). When the offset current I_{os} is greater than the threshold current I_{th} , there is no code which is ineffective in the control of the optical output of the laser diode 1 (Fig. 18(a)). Consequently, the quantization widths W_3 (Fig. 18(a)) or W_4 (Fig. 18(b)) in the system of Fig. 17 is narrow, compared to those obtained by the system of Fig. 5 even when the D/A converters 10 used in both the systems have the same resolution characteristics, resulting in an improved effective resolution of the D/A converter 10 and also in a very accurate control of the optical output.

Figure 19 shows diagrammatically a further embodiment of the invention. In the system of Fig. 19, the monitor signal detected by the circuit consisting of a photodiode 2 and a resistor 5 is converted to computing codes by an A/D converter 23, and sent to a computing means 24. The computing means 24 has a memory. The digital codes from the A/D converter 23 are processed in the computing means 24. The obtained result is fed back to

a laser diode 1 through a D/A converter 10, a current source 4, and a switch 6.

The system of Fig. 19 will be described more specifically with reference to Fig. 20. The system of Fig. 20 is constructed so that an optical output of any desired level can be obtained only by conducting the calibration two times. In the example, the A/D converter 23 consists of a comparator 3, an analog switch 15, an up/down counter 11, and an oscillator 12. In the system of Fig. 20, the relationship between the optical output P_o and a forward current I_F can be calculated by the following Equation (1):

$$P_o = \eta I_F + \xi \quad (1)$$

For example, the calibration is conducted for two optical output levels P_{o1} and P_{o2} to obtain an amount of the forward current I_F for each output level. When a value I_{F1} is obtained for the output level P_{o1} and a value I_{F2} for the output P_{o2} , the constants η and ξ can be calculated from the following Equations (2) and (3):

$$\eta = \frac{P_{o2} - P_{o1}}{I_{F2} - I_{F1}} \quad \dots \quad (2)$$

$$\xi = \frac{P_{o1} I_{F2} - P_{o2} I_{F1}}{I_{F2} - I_{F1}} \quad \dots \quad (3)$$

Therefore, a level I_{F3} of the forward current which is required for obtaining an optical output of any desired level P_{o3} can be calculated from the Equation (1). This is illustrated in Fig. 21.

The operation of the system of Fig. 20 will be described. The values of the two levels P_{o1} and P_{o2} at each of which the calibration is to be conducted are previously stored in the memory of the computing means 24. The calibration is done by applying the reference voltage V_{ref1} or V_{ref2} to the comparator 3. The reference voltages V_{ref1} and V_{ref2} correspond to the optical output levels P_{o1} and P_{o2} , respectively. The output of the counter 11 obtained at each calibration is stored in the memory of the computing means 24. The stored output of the counter 11 corresponds to the forward current I_{F1} or I_{F2} by which the laser diode 1 is driven to emit the optical output of the level P_{o1} or P_{o2} . From the stored data, η and ξ are calculated using the Equations (2) and (3). Then, the system conducts an operation process of driving the laser diode 1. When an optical output of another level P_{o3} is to be emitted, the computing means 24 calculates the value of a forward current I_{F3} which is necessary for obtaining the desired optical output level P_{o3} . This is calculated from Equation (1), and is sent to the D/A converter 10. As easily understood from the above, the feedback loop from the photodiode 2 to the counter 11 is not necessary when driving the laser diode 1. Even when the desired optical output level P_{o3} is rapidly changed, therefore, the system can precisely drive the laser diode 1 at the desired level P_{o3} . The calibration may be conducted when an operating condition affecting the optical output level (for example, an ambient temperature) varies.

As seen from the above-mentioned description of the preferred embodiments, a D/A converter having low resolution which can be easily produced at a low cost can be used in an apparatus of the present invention. Therefore, an apparatus of the present invention can be easily manufactured at a low cost and is easily integrated.

It is understood that various other modifications will be apparent to and can be readily made by those skilled in the art without departing from the scope and spirit of this invention. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the description as set forth herein, but rather that the claims be construed as encompassing all the features of patentable novelty that reside in the present invention, including all features that would be treated as equivalents thereof by those skilled in the art to which this invention pertains.

Claims

1. In an apparatus for driving a semiconductor laser device (1) wherein the optical output of said laser device is maintained at a predetermined level by a feedback control, at least two D/A converters (10,15) are provided, one of said D/A converters (10) being used for conducting a coarse adjustment of the

optical output level, and another of said D/A converters (15) being used for conducting a fine adjustment of the optical output level.

2. An apparatus for driving a semiconductor laser device (1) according to claim 1, wherein at least two feedback loops are formed to conduct the feedback control, and said D/A converters are disposed in said feedback loops, respectively.

3. In an apparatus for driving a semiconductor laser device (1) comprising a D/A converter (10a) disposed in a feedback loop for controlling the optical output of said laser device, said D/A converter has a non-linear characteristic.

4. In an apparatus for driving a semiconductor laser device (1) comprising a D/A converter (10b) disposed in a feedback loop for controlling the optical output of said laser device, said D/A converter provides an offset output.

5. In an apparatus for driving a semiconductor laser device (1) comprising a D/A converter (10) disposed in a feedback loop for controlling the optical output of said laser device, a current supplying means (4a) is provided separately from said feedback loop, said current supplying means supplying a current of a predetermined level to said laser device.

6. In an apparatus for driving a semiconductor laser device (1) comprising a D/A converter (10), the input of said D/A converter is connected to a control means 24 for controlling the optical output of said laser device, said control means comprising a memory means in which one or more relations between optical output levels of said laser device and output levels of said control means (24) are previously stored, said control means calculating from said stored relations a level of an output which corresponds to a predetermined optical output level and supplying an output of the calculated level to said D/A converter (10).

18.05.88

0287360

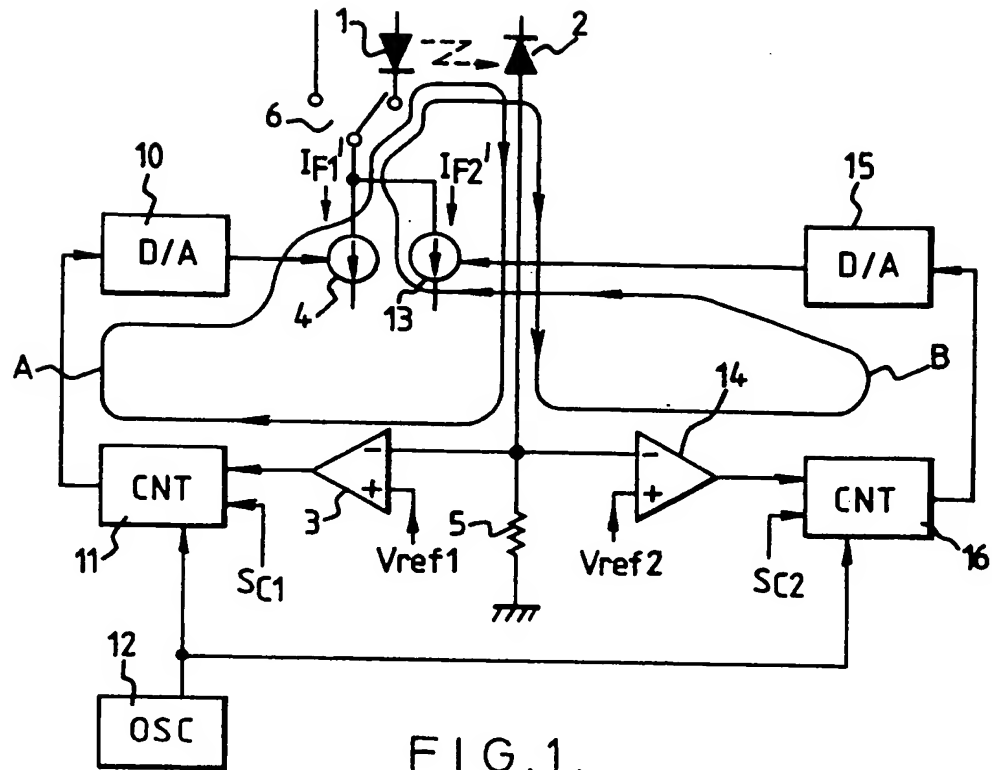


FIG. 1.

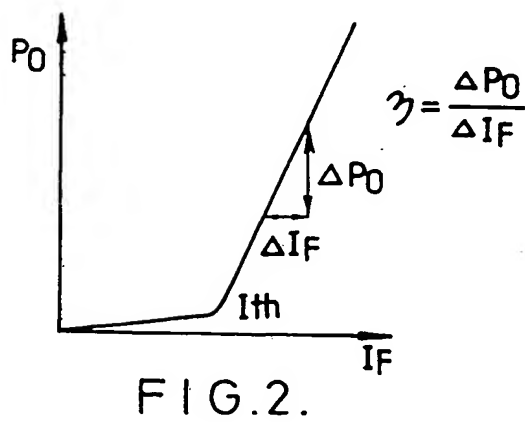


FIG. 2.

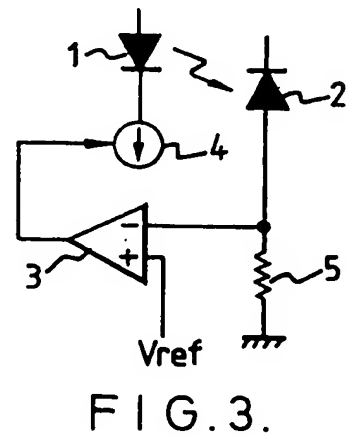


FIG. 3.

18.05.88

0287360

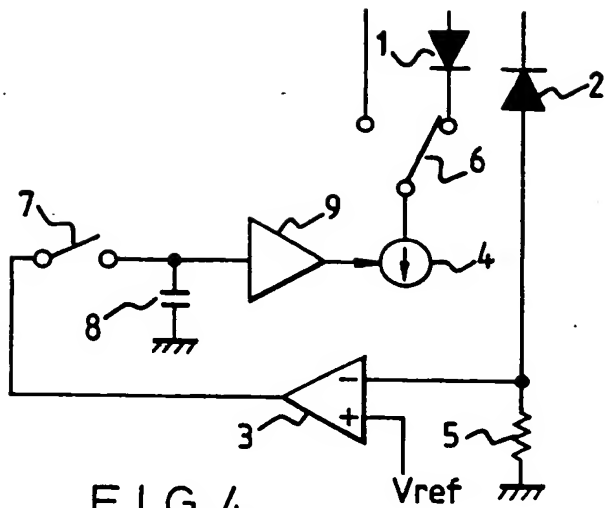


FIG. 4.

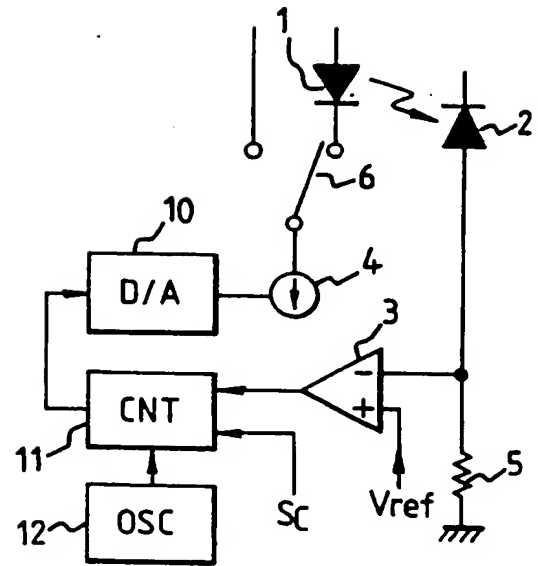


FIG. 5.

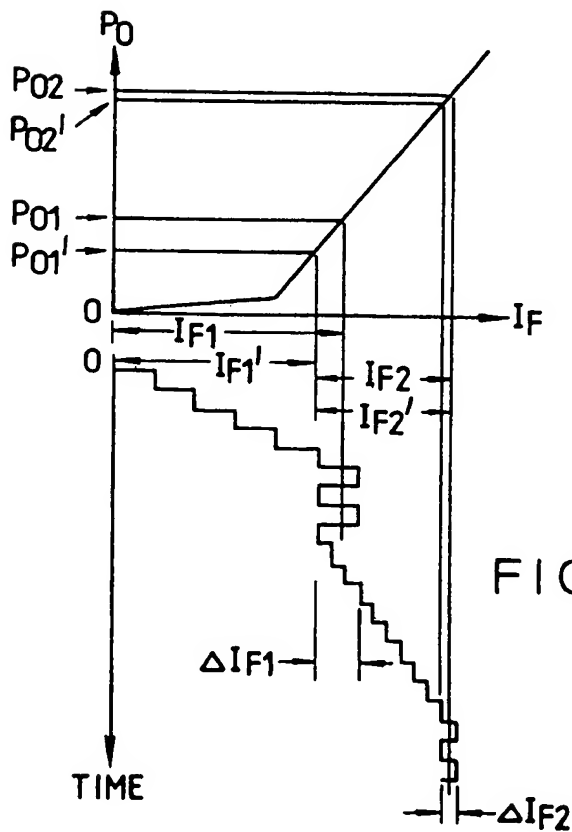


FIG. 6.

16.05.88

0287360

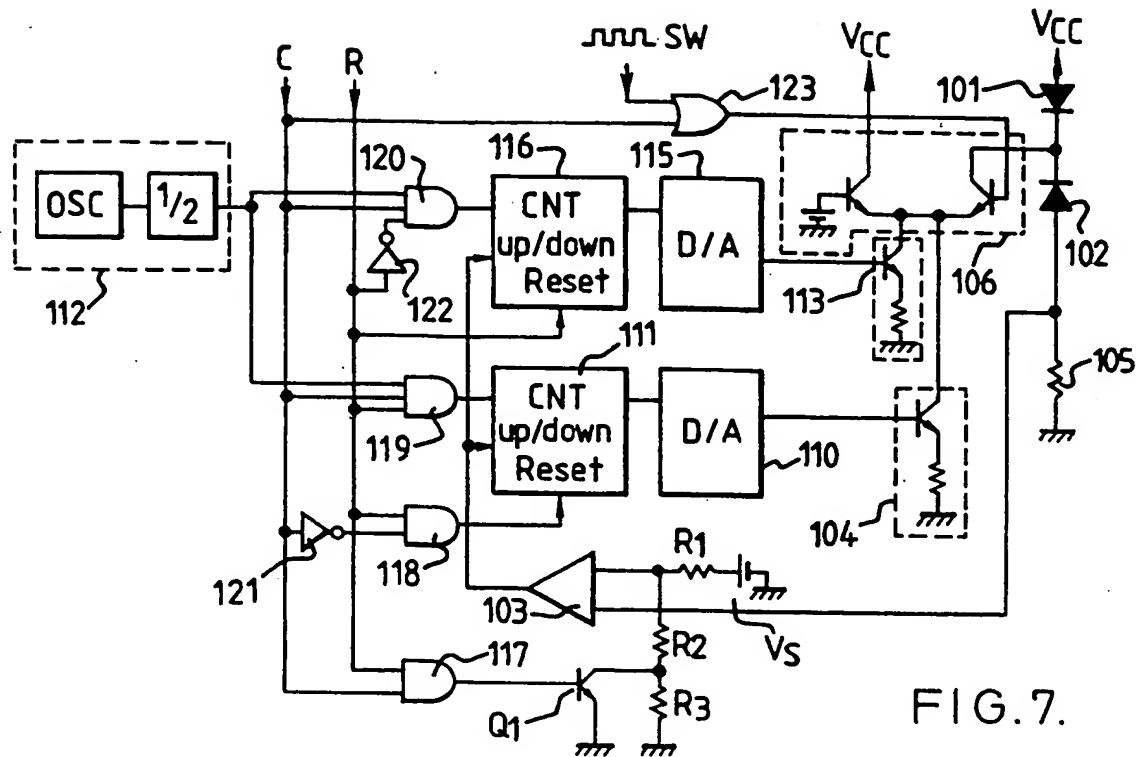


FIG. 7.

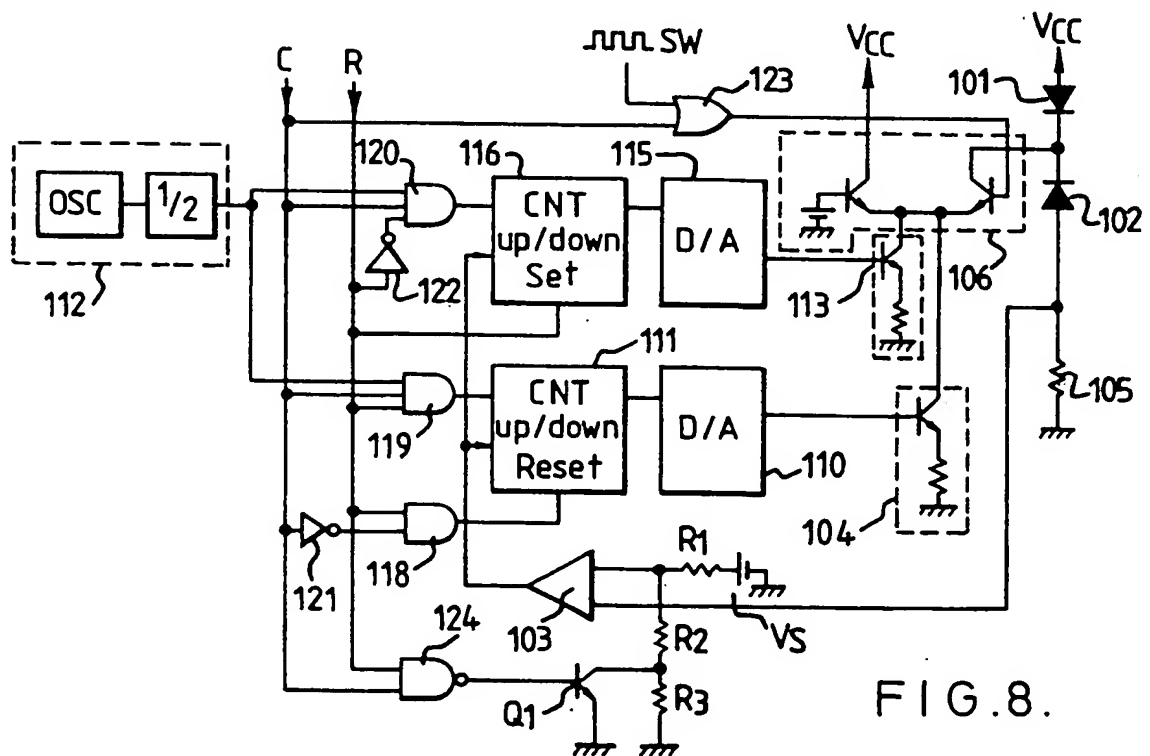


FIG. 8.

16.05.88

0287360

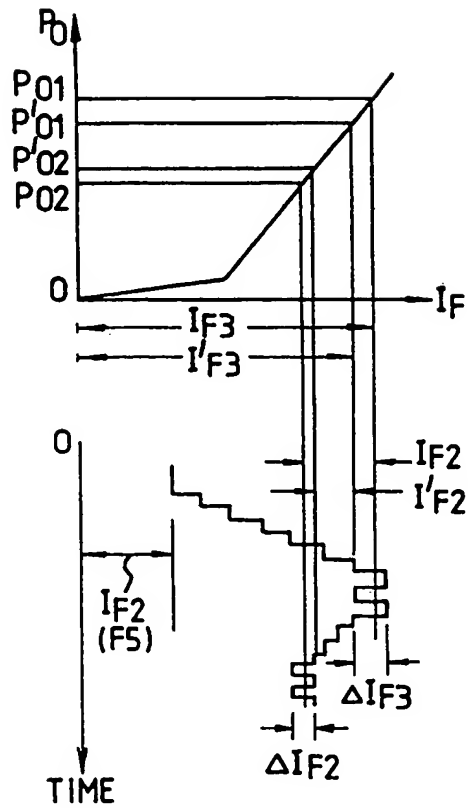


FIG. 9.

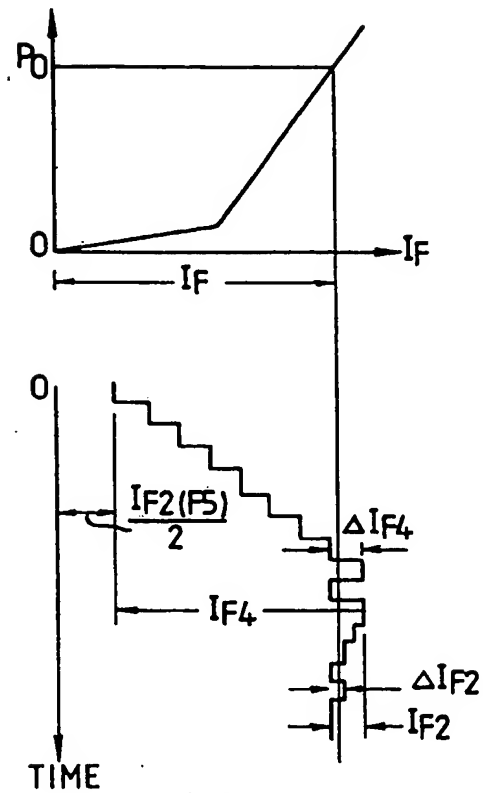


FIG. 11.

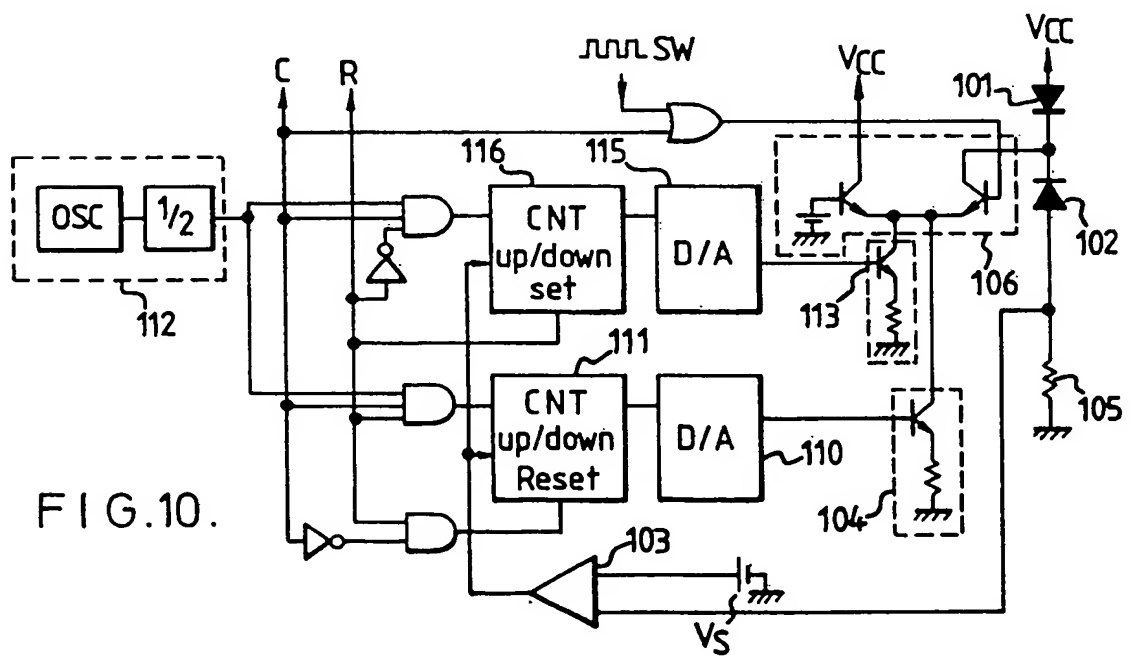


FIG. 10.

0588

0287360

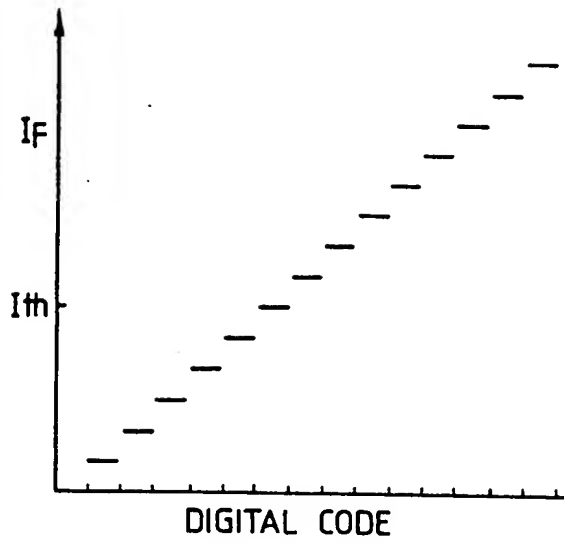


FIG. 12a.

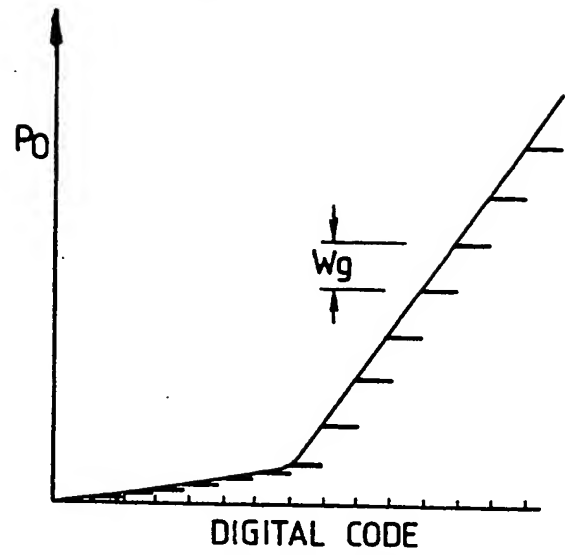


FIG. 12b.

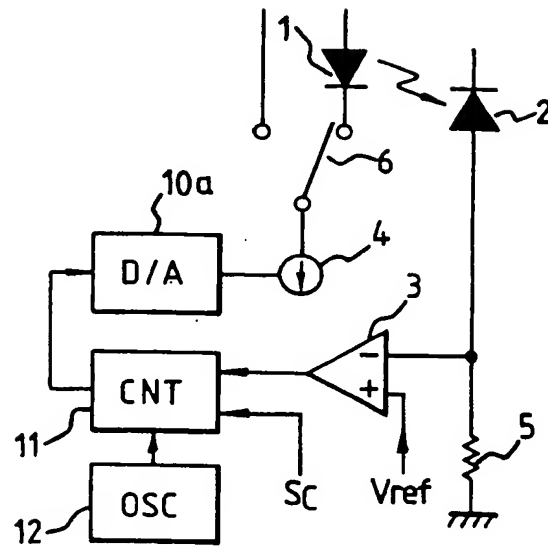


FIG. 13.

1A.05.88

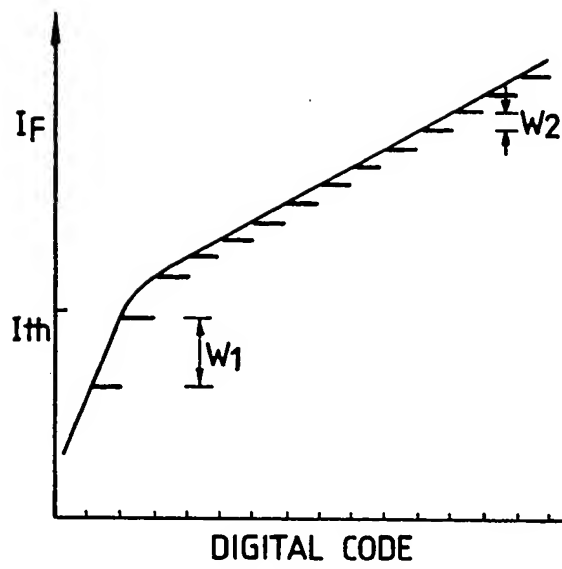


FIG. 14a.

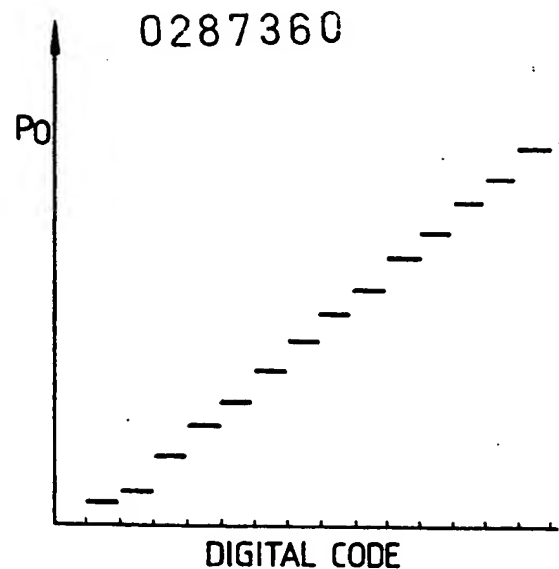


FIG. 14b.



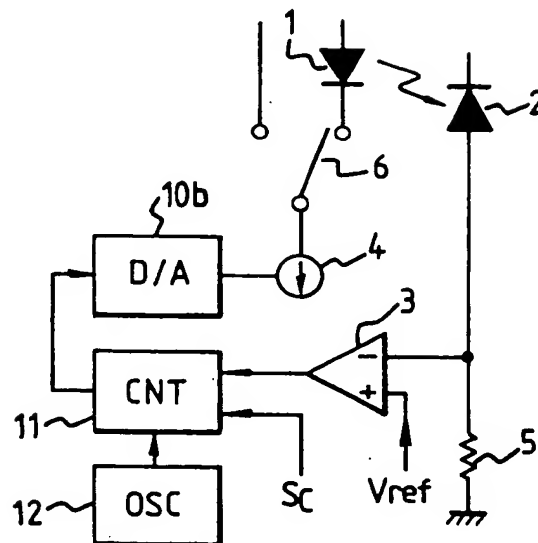



FIG. 15.

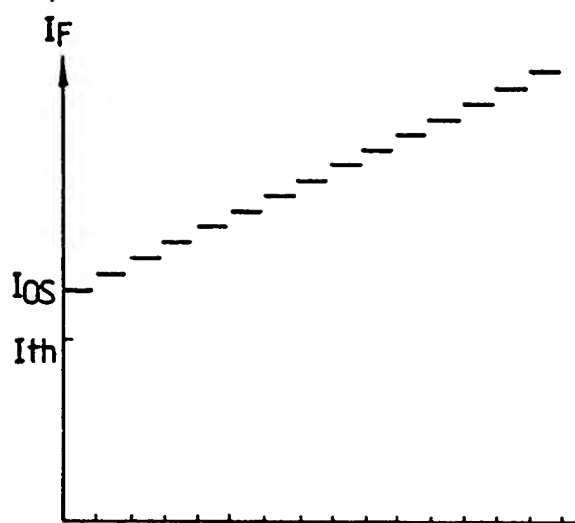


DIGITAL CODE
FIG. 16a.

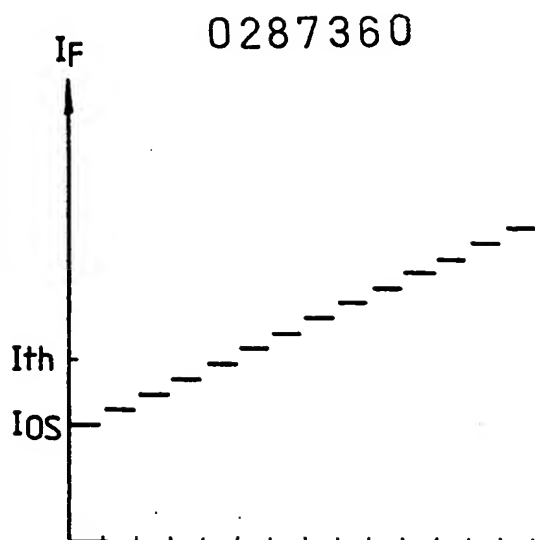

DIGITAL CODE
FIG. 16b.

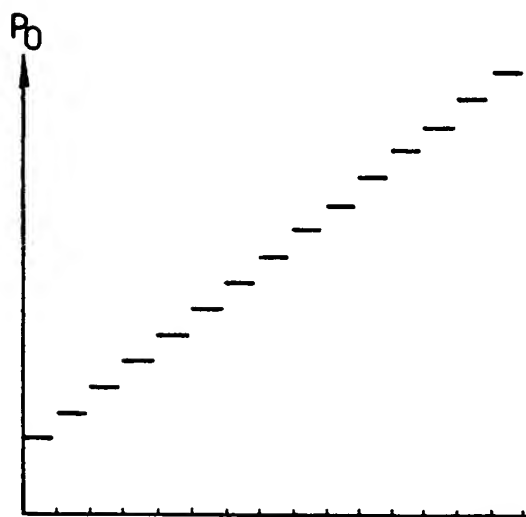

DIGITAL CODE
FIG. 16c.

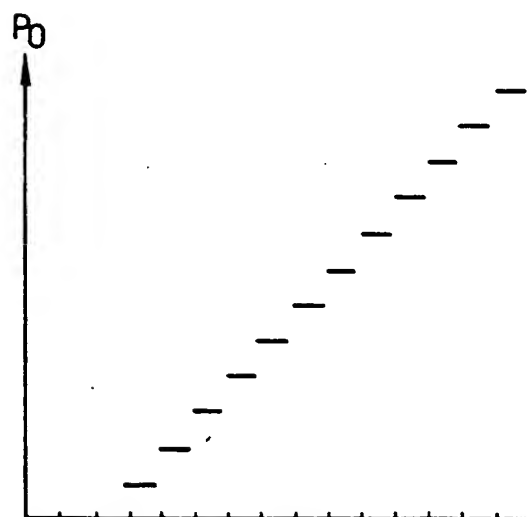

DIGITAL CODE
FIG. 16d.

0287360



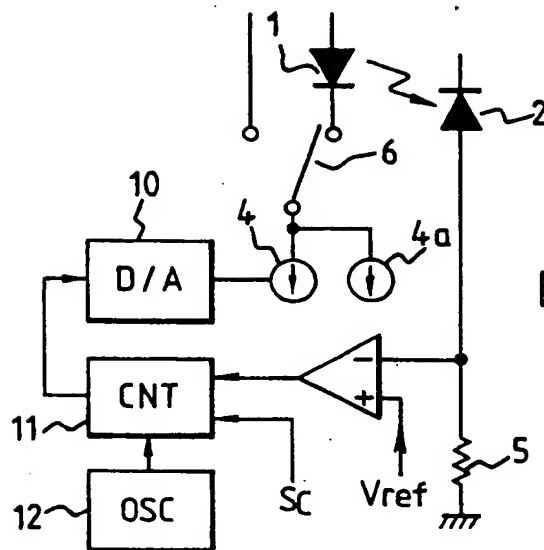


FIG.17.

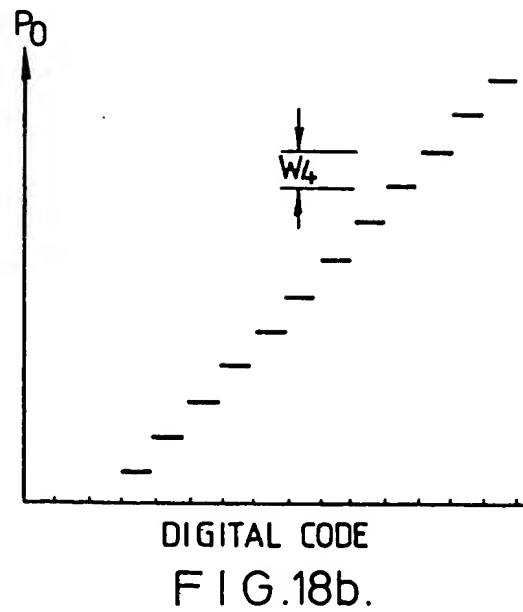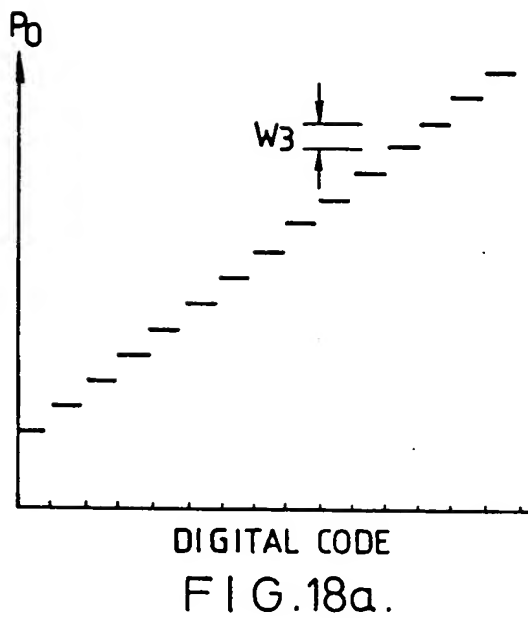

18.05.88

0287360

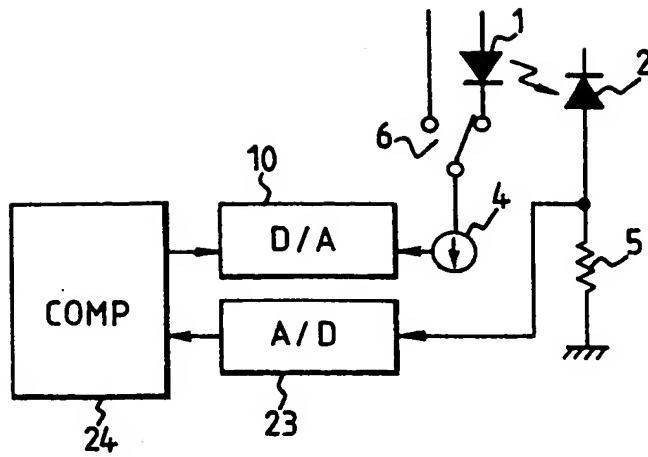


FIG. 19.

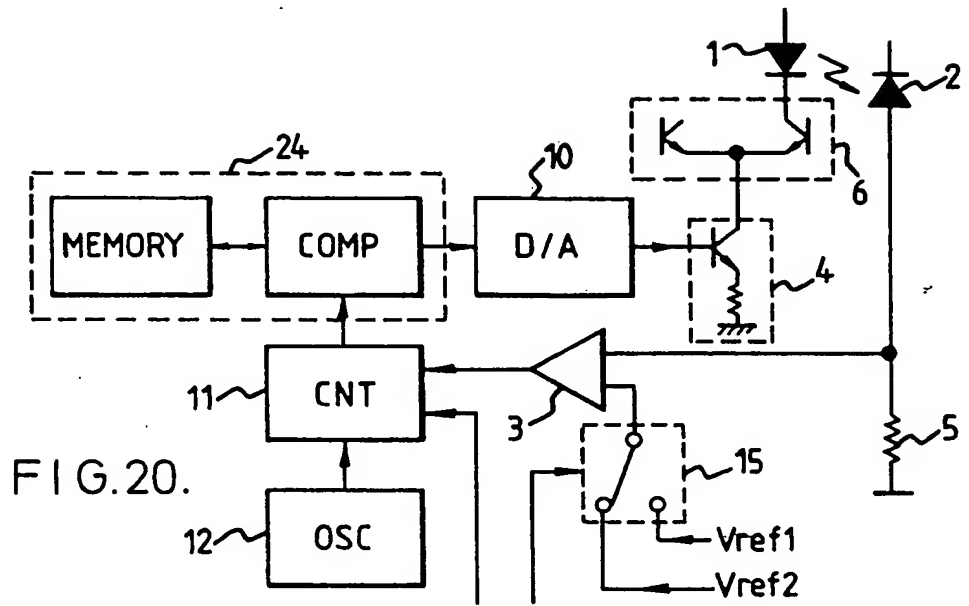


FIG. 20.

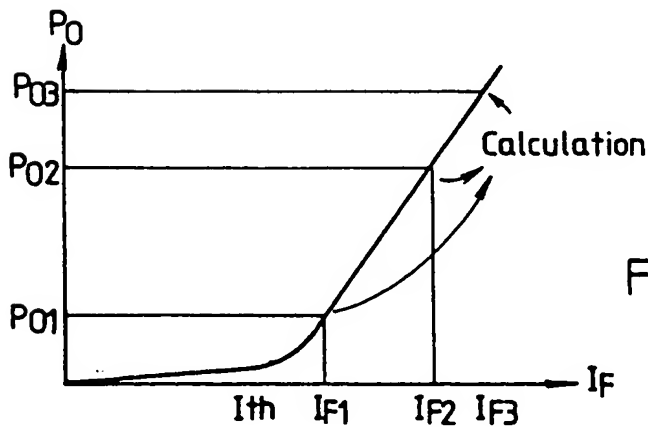


FIG. 21.

12

EUROPEAN PATENT APPLICATION

21 Application number: 88303348.2

51 Int. Cl.⁴: H 01 S 3/133

22 Date of filing: 13.04.88

30 Priority: 13.04.87 JP 90168/87
 13.04.87 JP 90169/87
 13.04.87 JP 90170/87
 13.04.87 JP 90171/87
 13.04.87 JP 90172/87
 05.02.88 JP 25886/88
 09.03.88 JP 55747/88

43 Date of publication of application:
 19.10.88 Bulletin 88/42

84 Designated Contracting States: DE FR GB IT NL

88 Date of deferred publication of search report:
 10.05.89 Bulletin 89/19

71 Applicant: SHARP KABUSHIKI KAISHA
 22-22 Nagaike-cho Abeno-ku
 Osaka 545 (JP)

72 Inventor: Hatanaka, Kazuomi
 846, Otoda-cho
 Ikoma-shi Nara-ken (JP)

Ohno, Takashi
 3-25-12, Temmadalnishi Haibara-cho
 Uda-gun Nara-ken (JP)

Ogou, Kenji
 1-31-403, Higashikidera-cho
 Nara-shi Nara-ken (JP)

74 Representative: White, Martin David et al
 MARKS & CLERK 57/60 Lincoln's Inn Fields
 London WC2A 3LS (GB)

54 An apparatus for driving a semiconductor laser device.

57 An apparatus for driving a semiconductor laser device (1) wherein the optical output of the laser device is maintained at a predetermined level by means of two feedback control loops (A and B). The apparatus comprises at least two D/A converters (10, 15). One of said D/A converters (10) is used for conducting a coarse adjustment of the optical output level, and another of the D/A converters (15) is used for conducting a fine adjustment of the optical output level.

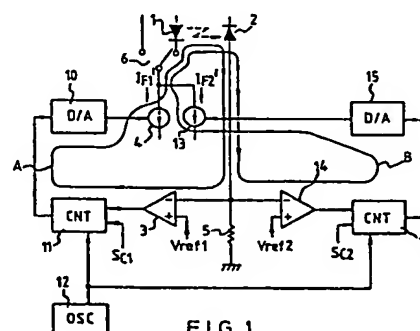


FIG.1.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 88 30 3348

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	CA-B-1 210 070 (G.R. CLINTON) * Pages 5-6; figures 1-2 *	1-6	H 01 S 3/133
A	US-A-4 692 606 (M. SAKAI et al.) * Column 6, lines 1-28; figures 1-5 * & JP-A-61 090 539	1-6	
A	EP-A-0 061 034 (IBM) * Pages 7,8; figures 1-4 *	1-6	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			H 01 S
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15-02-1989	Examiner MALIC K.
CATEGORY OF CITED DOCUMENTS			
<div>X : particularly relevant if taken alone</div> <div>Y : particularly relevant if combined with another document of the same category</div> <div>A : technological background</div> <div>O : non-written disclosure</div> <div>P : intermediate document</div> <div>T : theory or principle underlying the invention</div> <div>E : earlier patent document, but published on, or after the filing date</div> <div>D : document cited in the application</div> <div>L : document cited for other reasons</div> <div>& : member of the same patent family, corresponding document</div>			

EPO FORM 1503 03.82 (P0401)